



12" & 18" Mooring Buoy




18" Mooring Buoy
with External Ballast



24" Mooring Buoy

Mooring BUOYS

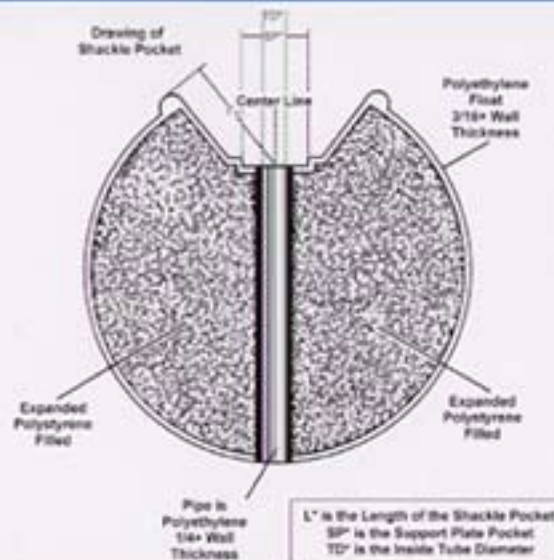

Buoy Specifications

The impact resistant high density polyethylene shell is 3/16" thick and filled with expanded polystyrene foam for the most reliable floatation. Thick wear resistant polyethylene tube is molded into the shell. Standard buoy is white with a reflective blue strip. Additional colors, graphics, reflective tape and ballast are available. All buoys have a two year warranty.

Dia.	12"	18"	24"	32"	32" w/Shackle Pocket
Buoy	25lbs.	95lbs.	180lbs.	500lbs.	495lbs.
Wt.	4lbs.	11lbs.	17lbs.	31lbs.	31lbs.
Tube ID.	1-1/2"	2 or 3"	2 or 3"	2 or 3"	2 or 3"
Shackle Pocket Length		4"	6-1/2"	10"	10"



32" Mooring Buoy
w/Shackle Pocket

Special Buoy



Underwater
Buoy
Supports 19lbs.

www.boatmoorings.com
(603) 672-1751

Marker Buoys



All marker buoys are foam filled for maximum buoyancy. Each contains five pounds of concrete which adds strength to the shackle bolt insuring superior durability in active waters.

Construction Specifications

- 48" overall height • Upper tube 26"
- Ball diameter 18" • Lower ballast tube 6"
- 39lbs. total weight • 20lbs. ballast concrete
 - Expanded Polystyrene foam filled
 - Stainless steel connecting pin

Flotation Specifications

- Minimum 15lbs. ground tackle
- Maximum 85lbs. ground tackle
- 93lbs. buoyancy to 1" below top of ball
- 9-1/2" underwater with no ground tackle
- 13" underwater with 15lbs. ground tackle

Custom Graphics



We provide custom mold-in graphic services. Contact us for more information and pricing.

www.boatmoorings.com
(603) 672-1751



Mooring & Marker BUOYS

